



# BRAID WAREHOUSE - FINALE EMILIA (MODENA)

## A NEW COVER FOR A BUILDING DAMAGED BY THE EARTHQUAKE

In Finale Emilia, in the province of Modena, we created the laminated and matchboard wood roofing of a warehouse damaged by the 2012 earthquake. Glulam is an extremely flexible choice, which allows us to adapt each new solution to existing buildings. Furthermore, its resistance and elasticity give important anti-seismic characteristics to the artifacts. The advantages of glulam Wood as an anti-seismic material

### PRODUCT SPECIFICATION


Industrial building Magazzino industriale Production building Wooden cover

**Localization:** Finale Emilia (MO)

**Intended use:** Factories


**Architetur and structural design:**

**Total area:** ft

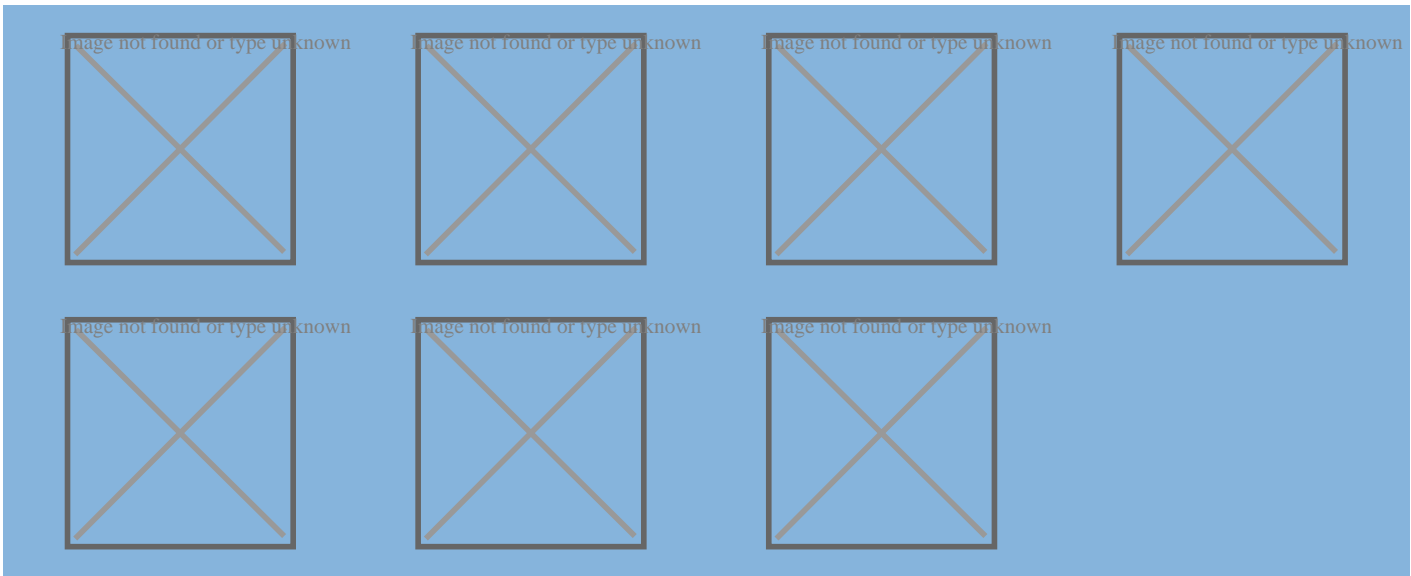

# BUILDING SYSTEM

## Laminated and Solid

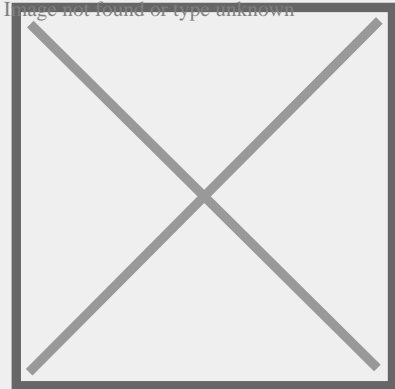

### Reasons for choosing the Laminated and Solid system


This construction system guarantees **the creation of timber roofs of various sizes and of different levels of complexity** in compliance with specific static loading calculations and transferring vertical and horizontal loads to the foundations by means of conventional building elements, in certain cases.

#### A durable and versatile timber roof

The unique characteristic of laminated wood and the connections between the various elements make it possible to create roof spans of more than 30 metres and **to build roofs of very large surface areas without having to break up the ground plan of the building with awkward intermediate pillars.**

#### High levels of insulation and strength

Depending on the thermal requirements, the **roof** can be completed with an insulating package and outer covering. The joists of the web roof structure can be designed in accordance with a very diverse range of geometries: the ridge beam establishes the shape of the roof while the wall plate beam can be adapted to match architectural, static or application requirements. The nodes of the web support structure can be created with metal plates fastened to the wood with screws and pins, with wood to wood joints, or by means of direct fastening with normal screws or full-threaded screws. Because they are extremely slender elements, timber joists or rafters must be braced with timber or steel elements designed to prevent the occurrence of lateral out-of-plane instability.



#### **Sede / Headquarter:**

Sistem Costruzioni s.r.l.  
Via Montegrappa 18 - 20  
41014 Solignano di Castelvetro (MO), Italy  
Tel. +39 059 797477 - 797591  
Fax. +39 059 797646

[info@sistem.it](mailto:info@sistem.it)  
[www.sistem.it](http://www.sistem.it)

#### **Sucursal Cuba**

Centro de Negocios Miramar  
Calle 3a e/e 76 y 78, Edificio Beijing,  
Piso 1, Oficina 133  
Ciudad de la Habana, Cuba  
Tel. 0053 7 2040823

[sistemcuba@enet.cu](mailto:sistemcuba@enet.cu)  
[www.sistem.it](http://www.sistem.it)